



Front Bumper

Part: J031T



Fit: 2007- 2018

Jeep Wrangler JK



REMOVE CONTENTS FROM BOX. VERIFY ALL PARTS ARE PRESENT.




READ INSTRUCTIONS CAREFULLY BEFORE STARTING INSTALLATION.



PLEASE USE SAFETY GLASSES & ENSURE TO BLOCK VEHICLE MOVEMENT DURING INSTALLATION PROCESS



60-180 min



Cutting Not Required



Drilling Not Required



support@trailfx.com



1 866 638 4870



POLISHED STAINLESS STEEL – LIMITED LIFETIME
POWDER COATED BLACK – 3 YEARS

BUMPER INSTALLATION PARTS LIST

Qty	Part Description	Qty	Part Description
2	M12x30mm Outer Hex Bolts	8	D12 Flat Washer
6	M12 Hex Nuts	8	D12 Lock Washer

FLUSH MOUNT LIGHT INSTALLATION PARTS LIST (LIGHTS SOLD SEPARATELY)


Qty	Part Description	Qty	Part Description
10	M6 x 20 mm Inside Hex Bolts	12	D6 Flat Washer
10	M6 Hex Nuts	10	D6 Lock Washer




INSTRUCTION PROCEDURE

Step 1: Remove the factory front bumper from vehicle, Position the TrailFx Front Bumper on the front of the vehicle. Line up the holes on the frame with the slotted holes on the bumper brackets. Attach the bumper to the frame using the supplied bolts.



Step 2: Make sure all bolts are securely tightened. Installation completed.

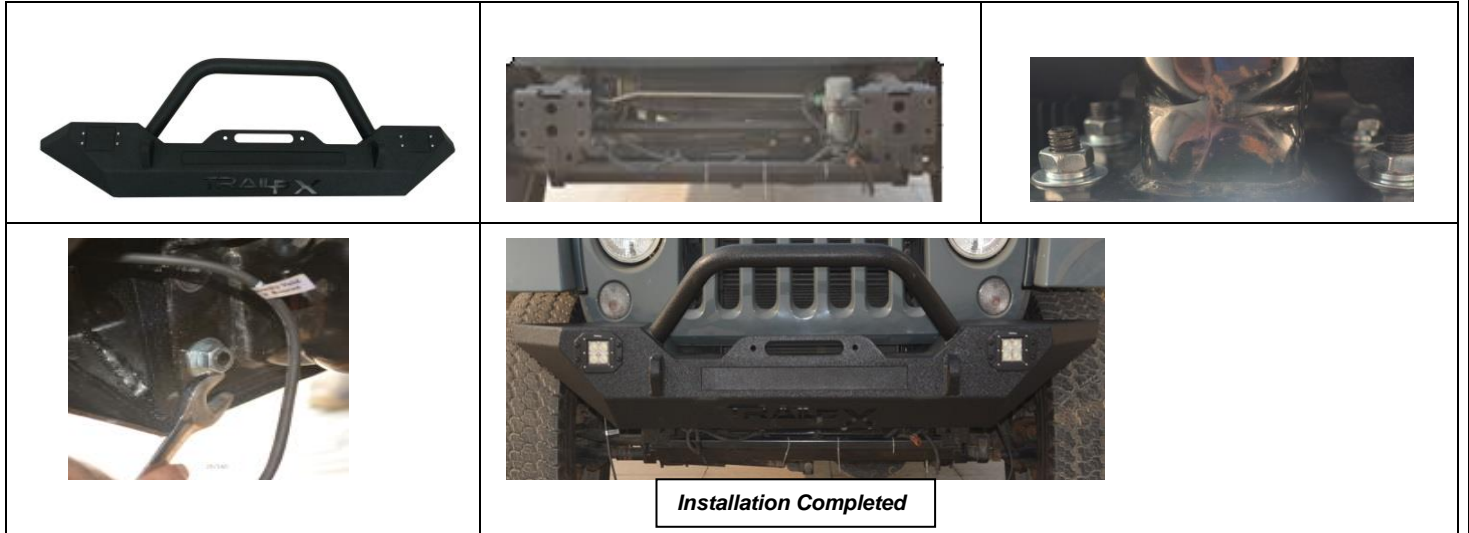

Flush Mount Light Installation Illustrated Below :-

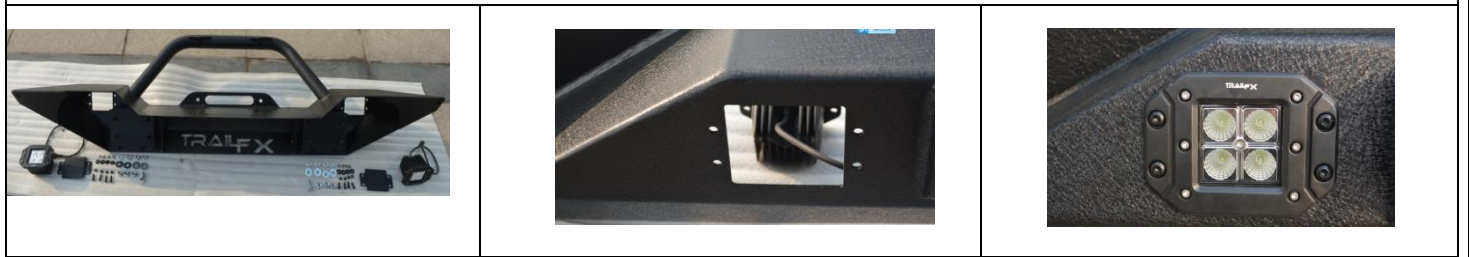

1. Place winch reinforcement plate under as shown. Bent flange portion is towards the rear of the vehicle.

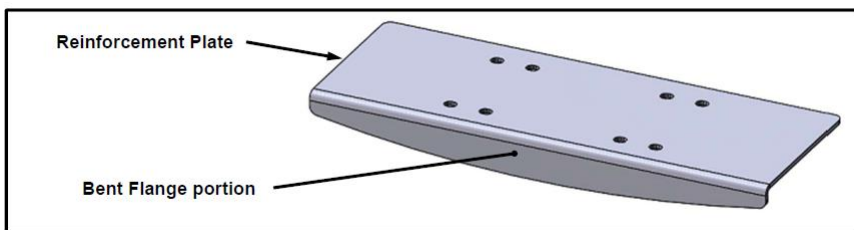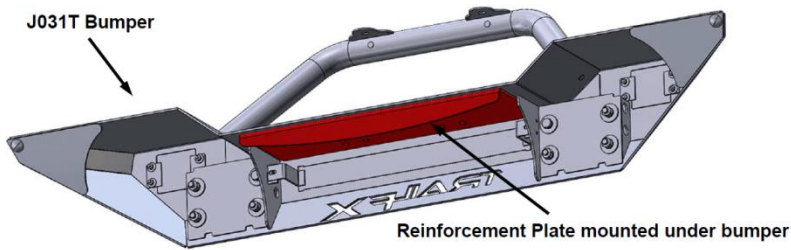

2. Install the winch and included hardware as directed by the manufacturers instructions.
3. IF using T8R WA012 TFX Winch mounting hardware; install hardware as directed.
4. Be sure to torque nuts and bolts to 33 ft- lbs.

Disclaimer: DO NOT EXCEED recommended towing or pulling limits. SEE VEHICLE'S OWNER'S MANUAL.

PRODUCT CARE

1. Periodically check the product to ensure all fasteners are tight and components are intact.
2. Regular waxing is recommended to protect the finish of the product.
3. **Use ONLY Non-Abrasive automotive wax.** Use of any soap, polish or wax that contains an abrasive is detrimental and can scratch the finish leading to corrosion.
4. Aluminum polish may be used to polish small scratches and scuffs for **Stainless Steel finish.**
5. Mild soap may be used to clean the product for both **Stainless Steel and Black finish.**

FAQ's

1. **Hardware's are not of correct size.**
In GMC / Chevrolet truck model 2006 & up, customer needs to reuse the factory body bolts to install the bracket. If your vehicle is not GMC / Chevrolet 2006 & up, please ensure that holes are not partially covered with any plastic grommet or rust? If it is, please remove the plastic grommet & rust from the thread holes & re-try the installation.
2. **Mounting Bracket are not getting Installed properly.**
In some cases Illustration images shown in Installation manual may not be the exactly same as per actual vehicle images ,also if Driver / Passenger side mounting brackets are very identical in the design, suggest referring Parts Identification guide to avoid fitment issue.
3. **Products are thumping / rattling after installation.**
Please ensure that all required mounting brackets / hardware's are installed & tighten correctly. Suggest using white lithium / regular grease between the metal to metal contact surfaces.
4. **Side Bar is not aligning with vehicle / Step Pads are not aligning with vehicle doors.**
Side bar may be interchanged or mounting brackets are not installed at the correct position in the vehicle. Please refer Parts identification guide.
5. **Missing / Excess Hardware.**
Recheck hardware count as per the part list.
6. **Product not installing properly.**
Ensure make model year, cab length and bed size of your vehicle is listed in the application. All installation steps are followed correctly.

Check out these other TrailFx Products!!

www.TrailFX.com



SIDE BAR



HEADACHE RACKS



BED RAILS



ROCKER GUARDS

Keystone Automotive Operations Inc. (KAO) warrants this product to be free of defects in material and workmanship at the time of purchase by the original retail consumer. KAO disclaims any other warranties, express or implied, including the warranty of fitness for a particular purpose or an intended use. If the product is found to be defective, KAO may replace or repair the product at our option, when the product is returned prepaid, with proof of purchase. Alteration to, improper installation, or misuse of this product voids the warranty. KAO's liability is limited to repair or replacement of products found to be defective, and specifically excludes liability for any incidental or consequential loss or damage.